

Product code: PAF-16

PVC Coated Fabric 580gsm


**Dutarp** PVC Tarpaulins can be stitched and Welded by High Frequency welding machine with special Grommets/ Eyelets. Reinforcements and Webbing as per customer's requirement.

**Characteristics**

- Excellent Water Proof.
- Lighter Than Cotton Canvas
- Does Not Stretch When You Use.
- Excellent Resistance to Weather.
- Fire Retardant as per DIN75200/BS3408

**Applications**

- Tents
- Boat Covers
- Truck Covers
- Tarpaulins
- Equipment Covers
- Open Top Container Covers

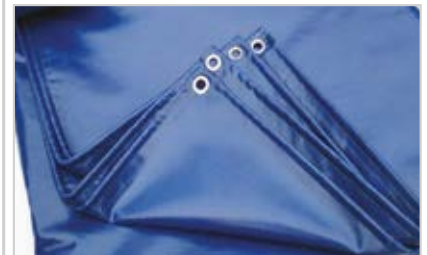

**Technical Data Sheet**

Base Cloth	Polyester		DIN6000
Construction	20x20/Inch Plain Weave		DIN EN 1049-2
Yarn (detex)	1000*1000 D		DIN EN ISO 2060
Type of Coating	PVC Coated on both sides		
Total Weight	580 Gr/Sqm		DIN EN ISO 2286-2
Width	183cm (72") , 300cm (118")		DIN EN ISO 2286-1
Tensile Strength	Warp	Weft	DIN 53354
	2700N/5cm	2500N/5cm	
Tear Strength	290N/5cm	270N/5cm	DIN 53356
Adhesion Strength	100N/5cm		
Temperature Resistant	-30°C to +70°C		
Flame Retardant	BS 5867 : Part 2 : 2007		

Standard Colours:



Green



Blue



Grey



Orange



Beige



Yellow.

